

Three-Phase Winding Ohmmeters

TWA Advanced Series

- Resistance measurement of all tap positions in all six windings performed in a single test
- True three-phase on-load tap changer dynamic resistance measurement
- Extremely quick measurement, single-step cable setup
- Rapid automatic demagnetization
- Fully automated test mode
- Large 10.1" or 7" graphical touchscreen display
- Temperature measurement channel



Description

The TWA advanced series instruments are designed for six-winding resistance measurement and simultaneous three phase on-load tap changer analysis of both the primary and the secondary transformer windings. This is performed with a one single-step cable setup, with test currents of up to 40A.

Each transformer configuration has a special measurement algorithm which is optimized for the fast stabilization of test results. The TWA instruments generate a true DC ripple-free current. Both the injection of the current and the discharge of energy from the magnetic circuit are automatically regulated.

Application


The list of the instrument application includes:

- Six-winding measurement of transformer winding resistances with a one-time cable connection
- A special mode which enables measuring the resistances of three transformer windings in the YN configuration simultaneously
- Dynamic resistance measurement (DVtest) of on-load tap changers
- An evaluation of synchronization between on-load tap changer phases
- A measurement of on-load tap changer motor current by using a dedicated channel
- A three-phase or single-phase automatic transformer demagnetization
- Fully automated test mode, with automatic detection of result stabilization


Connecting the TWA to a Transformer

Using two sets of four cables, all bushings of the primary and the secondary sides are connected only once. The connection to the transformer is made using two-contact clamps that provide the four-wire Kelvin test method.


The figure presents the simultaneous testing of both windings (high side and low side) on a three-phase transformer. The setup time is minimized and the test is performed very quickly. The speed is increased by saturating the magnetic core through the HV and LV windings at the same time, so the total test time is very short. The TWA test leads are interchangeable with the test leads for the TRT Three-Phase Transformer Turns Ratio Testers.

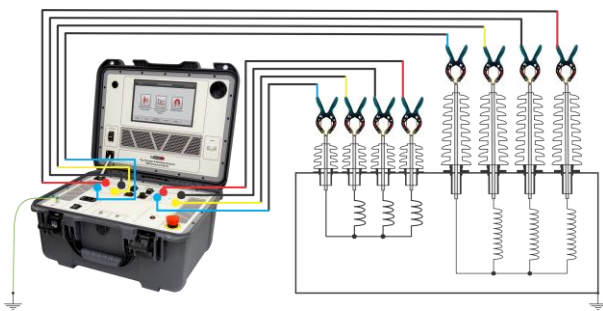

Connecting TWA500 to a three-phase transformer

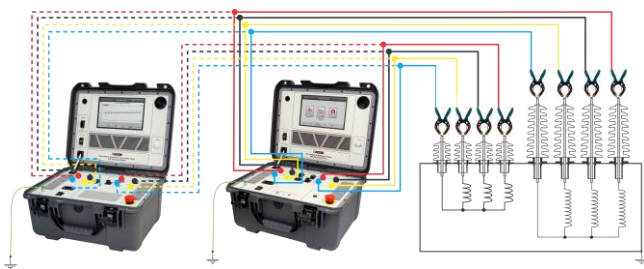

Connecting TWA500 and TRT500 to a three-phase transformer

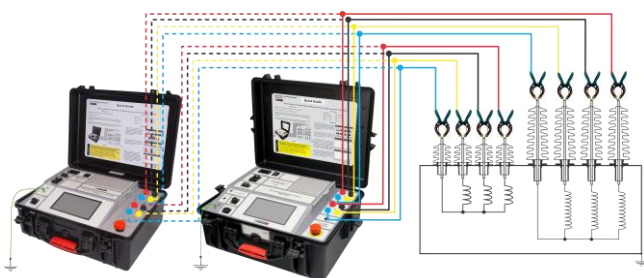


Connecting TWA400 and TRT400 to a three three-phase transformer

Benefits and Features

Six-Winding Resistance Measurement

The TWA injects the current with a voltage value as high as 55 V. This ensures that the magnetic core is saturated quickly and duration of the test is as short as possible. All transformer windings, both primary and secondary, can be measured with a single cable setup. All measurements are time and date-stamped. The TWA is protected from electrostatic and electromagnetic interference that exists in HV electric fields.

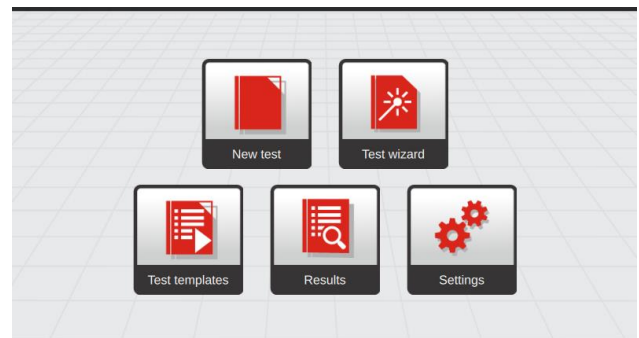

A special mode is provided for the resistance measurement in multiple de-energized tap changer (DETC) positions.


Another special mode enables measuring the resistances of three transformer windings in the YN configuration simultaneously. It is also possible to test the resistances of all tap changer positions of all three phases in a single pass through the tap changer positions.

On Load Tap Changers – Simultaneous Dynamic Resistance Measurement (DVtest) of All Three Phases

The TWA can be used to measure the winding resistance of the individual taps of a power transformer without discharging between the tests.

The unit also checks whether the on-load tap changer (OLTC) switches without an interruption. The moment a tap position is changed from one tap to another, the device detects a sudden, very short drop of the test current. These drops called "ripples" should be consistent, where any drop out-of-line should be

investigated. Tap changer malfunctions can be detected by analyzing the measurements of transition ripple, transition time, and visualizing DRM graphs, can be observed too. Test currents can reach up to 40 A in total in all three phases during the test. Dynamic resistance graphs can be recorded for all three phases simultaneously, so the synchronization is verified using the cursors provided in the DV-TR software. All three phase traces are plotted on the same graph. In addition, the tap changer motor current is recorded, and displayed on the same graph.

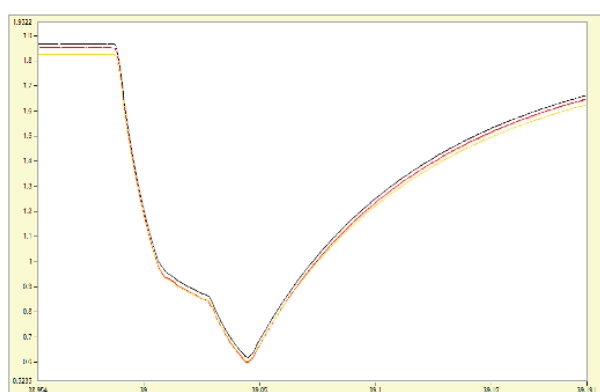

The built-in tap changer control unit enables remote control of the tap changer operation from the instrument's keyboard. The test can be performed using either a standalone instrument or DV-TR PC software.

DV-TR Software

The Windows-based DV-TR software enables control and observation of the test process, as well as saving and analyzing the results on a PC. It provides a test report, arranged in a selectable form as an Excel spreadsheet, PDF, Word, or ASCII format. The software provides an OLTC (tap changer) condition assessment through analysis of the graphs representing dynamic resistance values during the tap changer transitions. Additionally, the DV-TR measures and calculates the OLTC transition time, the ripple and the winding resistance for each tap changing operation. The standard interfaces are USB and Ethernet.

Tap Changer Motor Current Monitoring Channel

The AC and/or DC current monitoring channel enables monitoring and recording the OLTC mechanical drive motor current during the tap changer operation. The motor current waveform (or another useful signal) is printed on the same DVtest graph as the DC test current, and can help in detecting OLTC mechanical problems. Motor recording allows for DVtest recording using the motor operation trigger, which is useful for reactance tap changers.

Vibration Testing

The condition of on-load tap changers can also be observed by analyzing the graph of vibrations during its operation. The vibrations are measured on the external tank using an accelerometer and a dedicated measurement channel on the instrument. An accelerometer is available for purchase as an optional accessory.

Automatic Transformer Demagnetization

After a DC current test, such as a winding resistance measurement, the magnetic core of a power or instrument transformer may be magnetized. Also, when disconnecting a transformer from a service, some amount of magnetic flux trapped in the core could be present.

Demagnetizing the magnetic core of a transformer requires alternating current applied with decreasing magnitude down to zero. The TWA provides this alternating current by internally changing the polarity of a controlled DC current. During the demagnetization process the TWA supplies current at decreasing magnitude for each step, following the proprietary developed program.

Technical Data

Winding Resistance Measurement

- Test currents: 5 mA – 40 A DC
- Output voltage: up to 55 V DC
- Measurement range: 0,1 $\mu\Omega$ - 10 k Ω
- Typical accuracy: $\pm (0,1 \% \text{ rdg} + 0,1 \% \text{ F.S.})$

Resolution

- 0,1 $\mu\Omega$ – 999,9 $\mu\Omega$: 0,1 $\mu\Omega$
- 1,000 m Ω – 9,999 m Ω : 1 $\mu\Omega$
- 10,00 m Ω – 99,99 m Ω : 10 $\mu\Omega$
- 100,0 m Ω – 999,9 m Ω : 0,1 m Ω
- 1,000 Ω – 9,999 Ω : 1 m Ω
- 10,00 Ω - 99,99 Ω : 10 m Ω
- 100,0 Ω – 999,9 Ω : 0,1 Ω
- 1 000 Ω – 9 999 Ω : 1 Ω

OLTC Dynamic Resistance Measurement

- Sampling rate: 0,1 ms
- Automatic open circuit detection and warning
- Transition current ripple measurement
- Transition time measurement using DV-TR software
- Timing measurement of different transition changes using DV-TR graph analysis tool

AC Current Measurement Channel

- Resolution: 0,1 ms
- Amplitude resolution: 16 bit

Display

- 10.1" graphical touchscreen display (TWA500)
- 7" graphical touchscreen display (TWA400)

Computer Interface

- USB
- Ethernet

Current Clamp Meter Specifications

- Nominal current: 300 A_{RMS} or 450 A DC_{PK}
- Measuring ranges: 30/300 A
- Frequency range: DC to 20 kHz (-3 dB)
- Resolution: $\pm 50 / \pm 100$ mA
- Accuracy: $\pm 1\%$ of the reading

Warranty

- 3 years + 1 additional year upon registration on [DV Power official website](#)

Environmental Conditions

- Operating temperature: -20 $^{\circ}\text{C}$ - + 55 $^{\circ}\text{C}$ / -4 $^{\circ}\text{F}$ - +131 $^{\circ}\text{F}$
- Storage & transportation: -40 $^{\circ}\text{C}$ - + 70 $^{\circ}\text{C}$ / -40 $^{\circ}\text{F}$ - +158 $^{\circ}\text{F}$
- Humidity 0 % - 95 % relative humidity, non-condensing

Dimensions and Weight (TWA500)

- Dimensions (W x H x D): 505 mm x 257 mm x 409 mm
19.9 in x 10.1 in x 16.1 in
- Weight: 15,9 kg / 35.0 lbs

Dimensions and Weight (TWA400)

- Dimensions (W x H x D): 543 mm x 218 mm x 419 mm
21.4 in x 8.6 in x 16.5 in
- Weight: 15,0 kg / 33.0 lbs

Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Mains supply: 90 V - 264 V AC
- Frequency: 50/60 Hz
- Mains supply voltage fluctuations up to ± 10 % of the nominal voltage
- Input power: 1500 VA

Temperature Measurement

- One temperature measurement channel
Thermometer Pt100
-50 °C +180 °C / -58 °F +356 °F
50 mm x 6 mm

Printer (optional, TWA400 only)

- Thermal printer
- Paper width 80 mm

Vibration Measurement Channel

- Resolution: 0,1 ms
- ICP accelerometer, ± 100 mV/g, ± 50 g

Applicable Standards

- Installation/overvoltage: category II
- Pollution: degree 2
- Low voltage directive:
Directive 2014/35/EU (CE Conform)
Applicable standards, for a class I instrument, pollution degree 2, installation category II: IEC EN 61010-1
- Electromagnetic compatibility:
Directive 2014/30/EU (CE Conform)
Applicable standard EN 61326-1
- CAN/CSA-C22.2 No. 61010-1, 2nd edition, including Amendment 1

*All specifications herein are valid at ambient temperature of + 25 °C and standard accessories.
Specifications are subject to change without notice.
Specifications are valid if the instrument is used with the standard set of accessories.*

		
<p>H winding test cable set</p>	<p>X winding test cable set</p>	<p>Cable plastic case</p>
		
<p>Current clamp 30/300 A</p>	<p>Test shunt</p>	<p>Transport case</p>
		
<p>Temperature sensor Pt 100</p>	<p>ICP accelerometer with connecting cable and mounting tools</p>	<p>Tap changer control cable</p>

Ordering Information

Instrument with included accessories	Article No
Tap Changer & Winding Analyzer TWA500	TWA500X-N-01
Tap Changer & Winding Analyzer TWA400	TWA400X-N-01

Included accessories
DV-TR PC software including USB cable and Ethernet cable
Tap Changer Control cable 5 m (16.4 ft)
Debug adapter**
Mains Power cable
Ground (PE) cable
Transport case

Standard accessories	Article No
H winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series)	HC-10-4FMCWC
X winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series)	XC-10-4FFCWC
Current clamp 30/300 A power supplied from the instrument with 5 m (16.4 ft) extension	CACL-0300-06
Cable plastic case	CABLE-CAS-03

Optional Accessories	Article No
H winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TWA and TRT series)	HC-05-4FMCWC
X winding test lead set, 4 x 5 m (16.4 ft) with TTA clamps (compatible with TWA and TRT series)	XC-05-4FFCWC
H winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series)	HC-10-4FMCWC
X winding test lead set, 4 x 10 m (32.8 ft) with TTA clamps (compatible with TWA and TRT series)	XC-10-4FFCWC
H winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TWA and TRT series)	HC-15-4FMCWC
X winding test lead set, 4 x 15 m (49.2 ft) with TTA clamps (compatible with TWA and TRT series)	XC-15-4FFCWC
H winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TWA and TRT series)	HC-20-4FMCWC
X winding test lead set, 4 x 20 m (65.6 ft) with TTA clamps (compatible with TWA and TRT series)	XC-20-4FFCWC

H winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TWA and TRT series)	HE-05-4FMCFC
X winding cable extension set, 4 x 5 m (16.4 ft) (compatible with TWA and TRT series)	XE-05-4FFCMC
H winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TWA and TRT series)	HE-10-4FMCFC
X winding cable extension set, 4 x 10 m (32.8 ft) (compatible with TWA and TRT series)	XE-10-4FFCMC
H winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TWA and TRT series)	HE-15-4FMCFC
X winding cable extension set, 4 x 15 m (49.2 ft) (compatible with TWA and TRT series)	XE-15-4FFCMC
Current clamp 30/300 A power supplied from the instrument with 5 m (16.4 ft) extension	CACL-0300-06
Temperature sensor 1 x 50 mm (1.97 in) + 5 m (16.4 ft) cable	TEMP1-050-05
Temperature sensor 1 x 50 mm (1.97 in) + 10 m (32.8 ft) cable	TEMP1-050-10
Temperature sensor 1 x 50 mm (1.97 in) + 15 m (49.2 ft) cable	TEMP1-050-15
Temperature sensor 1 x 50 mm (1.97 in) + 20 m (65.6 ft) cable	TEMP1-050-20
ICP Accelerometer with 5 m (16.4 ft) connecting cable and mounting tools	ICP0-100-005
ICP Accelerometer with 10 m (32.8 ft) connecting cable and mounting tools	ICP0-100-010
ICP Accelerometer with 15 m (49.2 ft) connecting cable and mounting tools	ICP0-100-015
Test Shunt 1 mΩ (150 A / 150 mV)	SHUNT-150-MK
Transport case for 500 series**	HARD-CASE-NC
Transport case for 500 series – with wheels**	HARD-CASE-NW
Transport case for instrument in Plastic housing - large size*	HARD-CASE-BC
Transport case for instrument in Plastic housing with wheels - large size*	HARD-CASE-BW
Cable plastic case – medium size	CABLE-CAS-02
Cable plastic case with wheels – medium size	CABLE-CAS-W2
Cable plastic case – large size	CABLE-CAS-03
Cable plastic case with wheels – large size	CABLE-CAS-W3
Built-in thermal printer 80 mm (3.15 in)*	PRINT-080-00
Thermal paper roll 80 mm (3.15 in)*	PRINT-080-RO
TWA-TRT safety switchbox with ground cable	SWTCH-BOX-00
H connection between instrument and switchbox, 4 x 0.8 m (2.6 ft)	HE-08-4FMCMC
X connection between instrument and switchbox, 4 x 0.8 m (2.6 ft)	XE-08-4FFCFC

* For TWA400 model

** For TWA500 model

IBEKO Power AB
Stockholmsvägen 18
181 50 Lidingö, Sweden

Contact
Phone: +46 70 0925 000
E-mail: sales@dv-power.com